


INK RUB TESTER NACH "SUTHERLAND"

Rub Tester is designed to evaluate the scuffing or rubbing resistance of printed or coated surface of paper, paperboard, film, laminates, substrates, etc.

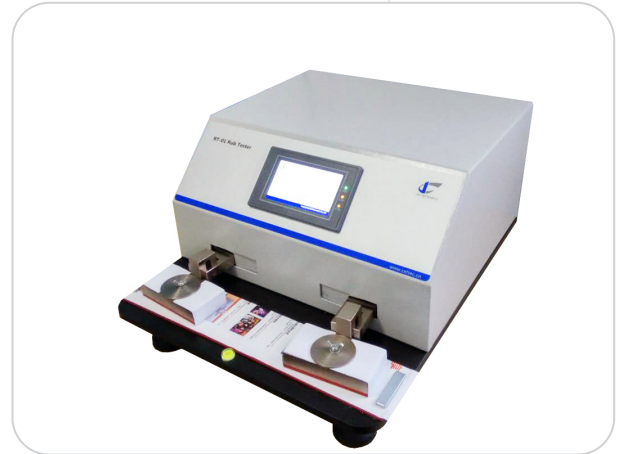

EIGENSCHAFTEN

- Rub Pressure 8.9 N(2lb); 17.8N(4lb)
- Rub Speed 20~120 cpm
- Sample Number 1~2
- Control PLC and HMI touch screen
- Power 110~220V

TECHNISCHE DATEN

Power connection	230 V / 50 Hz
Compressed air connection	nein
PC connection	No PC connection
Width / Diameter	49 cm
Depth	40 cm
Height	23 cm
Weight (net)	40 kg

NORMEN

ASTM D5264
FINAT FTM27
TAPPI T830